

FEATURES

- Small Footprint
- Low Capacitance
- High Speed

DESCRIPTION

The **SD040-101-411** is an UV Enhanced Silicon Photodiode assembled in a 1206 SMT package.

APPLICATIONS


- Industrial Sensors
- Light Management
- Handheld Devices

ABSOLUTE MAXIMUM RATING

T_a = 25°C UNLESS OTHERWISE NOTED

SYMBOL	PARAMETER	MIN	MAX	UNITS
V _R	Reverse Voltage		50	V
T _{Op}	Operating Temperature	-40	+105	°C
T _{Stg}	Storage Temperature	-50	+125	°C
T _S	Soldering Temperature		+260	°C

TYPICAL SPECTRAL RESPONSE

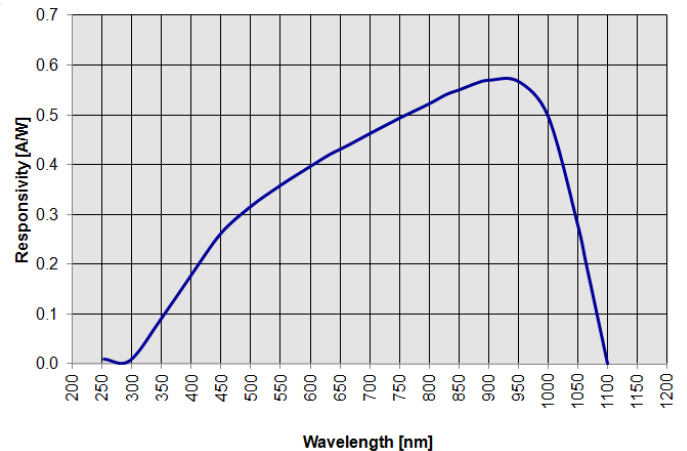

ELECTRO-OPTICAL CHARACTERISTICS RATING

T_a = 25°C, UNLESS OTHERWISE NOTED

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
V _f	Forward Voltage	I _f = 10 mA	0.5	0.8	1.3	V
I _L	Light Current (2856K)	V _R = 5V; H = 1000 lux	-	9.0	-	µA
V _{br}	Breakdown Voltage	I _R = 100 µA	50	-	-	V
R _{sh}	Shunt Resistance	V _{bias} = 10 mV	-	1.0	-	GΩ
I _d	Dark Current	V _R = 10 V	-	-	0.5	nA
C _j	Junction Capacitance	V _R = 5V; f = 1000 kHz	-	20	-	pF

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice. © 2014 Advanced Photonix, Inc. All rights reserved.

Advanced Photonix Inc. 1240 Avenida Acaso, Camarillo CA 93012 • Phone (805) 987-0146 • Fax (805) 484-9935 • www.advancedphotonix.com