

т	ם ا	н п	 D	0



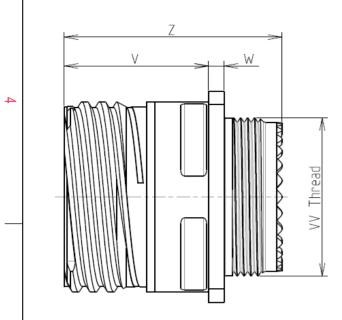

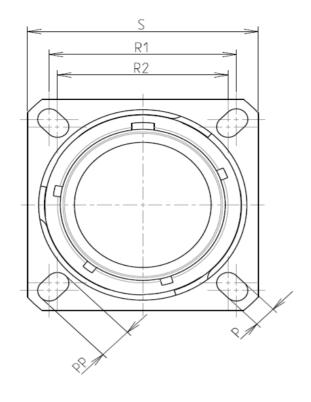

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65°C to +175°C			
-Salt Spray	: 500 hours			

: 14.49 g ± 10%

8D 0

G

11

Ζ

98

В

F

В

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			


ORIENTATION : B

CONTACT LAYOUT : 11-98

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

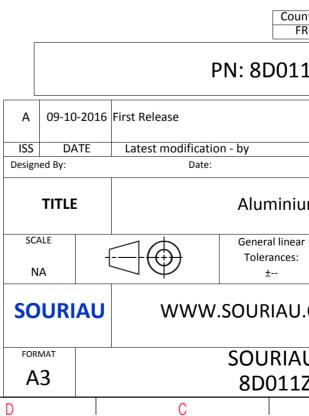

	Φ		А				
AS EX4	AMPLE				3		
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)							
untry FR	Jurisdiction & Control List Not Listed						
1Z98BB							
MOD N°							
um	CUSTOMER DRAWING Receptacle 8D series						
ar	NPRDS / PROJECT						
:	859						
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N°			SHEET			
.29	8BB-C B		A	1/2	J		

		۵	ات	m		0	
		Contact Layout				F	anel Cutou
4	-×($ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & $			٨	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Contino positive de la contra d	+.000 (0.00) +.130 (3.30) +.130 (3.30) +.000 (0.00) : +.065 (1.65) 065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) : 130 (3.30) +.000 (0.00) +.000 (0.00) +.000 (0.00) +.000 (0.00)	1		کر ۔ ا		ØT_
ယ	11 -98 6]			Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the P the Specifications issued b	roducts whi
N						(professional reco	ommendati Country FR
					A 09-10-20 ISS DATE Designed By:	016 First Release	D011Z
					TITLE	Alu 	Iminium eral linear erances:
→					SOURIA	U WWW.SOU	
					FORMAT A3		JRIAU 0011Z9
l	Н	G	F	E	D	C	

