


A

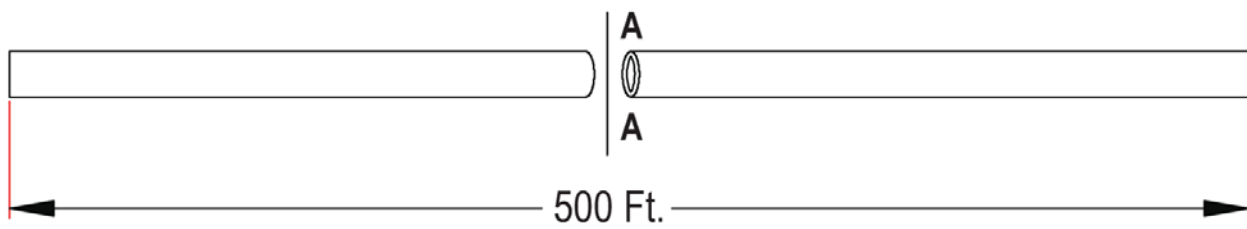

A

B

B

C




C

D

D

E

E

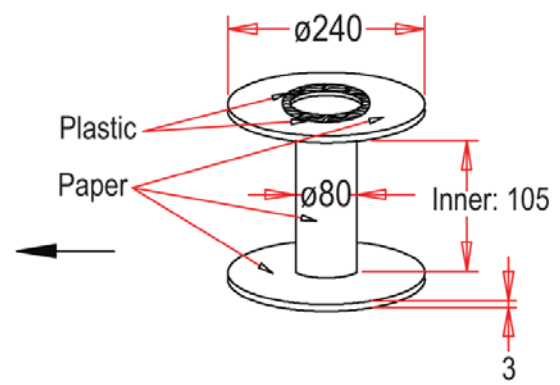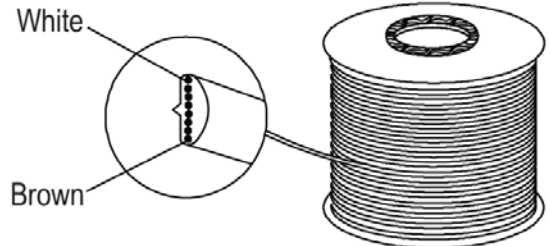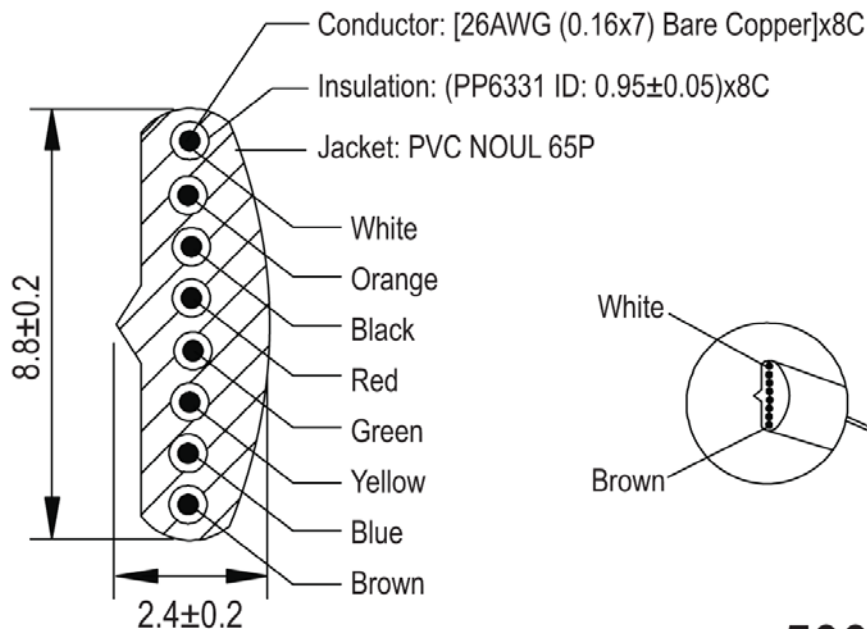

### 500Ft/R. "PE" Foam Wrapped

Voltage rating: 30V (DC)

Unit: MM

F

F

G

G

H

H



Scale	1:1						Name
TOLERANCE						Drawn	11.18.11
X.X	$\pm 0.40$					Approved	Chappell
X.XX	$\pm 0.25$						
X.XXX	$\pm 0.15$						
Angle	$\pm 3^\circ$						
Modification		Date		Name			

Item No.	<b>AT-K-26-8-S/500</b>
Title	Modular Straight cable - Raw, 8 Contact, 26AWG, Silver, 500Ft
Drawing No.	
Replace	rev00
Sheet	